

LIB-CD Series

LCD Monitor Display



LIB-CD Series is the LCD monitor display product. Support for 7*24 hours uninterrupted operation. When there is a signal input, the signal source is intelligently identified and the device can automatically switch to the corresponding channel without manual adjustment. 178° wide viewing angle to restore the real visual experience. LIB-CD Series includes screen sizes from 55 to 110 inch.


FEATURES



Ultra-highdisplay



Wide Viewing Angle

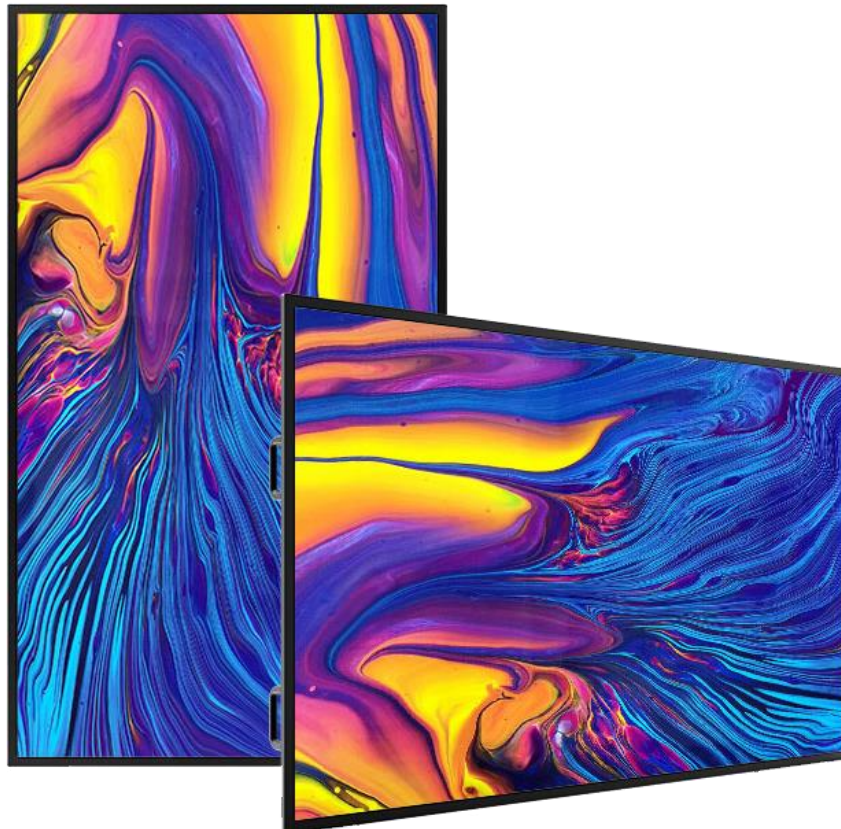

OPS port reserved



Horizontal / Vertical
installation

SPECIFICATION

Model	LIB-CD55	LIB-CD65	LIB-CD75	LIB-CD86	LIB-CD98	LIB-CD110
Screen size	55 inch	65 inch	75 inch	86 inch	98 inch	110 inch
Panel Grade	Grade A	Grade A	Grade A	Grade A	Grade A	Grade A
Resolution	3840 x 2160pixels	3840 x 2160pixels	3840 x 2160pixels	3840 x 2160pixels	3840 x 2160pixels	3840 x 2160pixels
Brightness (cd/m ²)	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)	400cd/m ² (typ.)	500cd/m ² (typ.)
Contrast ratio (Typ)	1200:1 (typ.)	1100:1, 1200:1, 4000:1, 5000:1 (typ.)			1200:1 (typ.)	1200:1 (typ.)
Visual Area (HxV) mm	1209.6 × 680.4	1428.48 x 803.52	1650.24 x 928.26	1895.04 x 1065.96	2158.85 x 1214.35	2436.48 × 1370.52
Back Light	LED					
Viewing Angles	178°(H)/178°(V)					
Refresh rate	60Hz	60Hz	60Hz	60Hz	60Hz	120Hz
Response Time	8 ms					
Color Gamut NTSC(Typ.)	70%	70%	70%	72%	69%	69%
Display Colour	1.07B (8-bit)					
Life Time	50,000hrs(min.)					
Chip	MSD3683					
Input	HDMI x 1, VGA x 1, DVI x 1, USB 2.0 x 1, RS232 x 1, Audio x 1					
Output	RS232 x 1, EARPHONE OUT x1					
Speaker	2x15W (max)	2x15W (max)	2x15W (max)	2x15W (max)	2x10W (max)	2x10W (max)
Max. Power Consumption	80W	180W	280W	320W	450W	550W
Standby Power Consumption	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
Power Supply	100-240V, 90-264V (Max.), 50/60Hz					
Working Temperature	0°C - 40°C					
Working Humidity	10% - 90% RH Non-Condensing					
Product Dimensions (mm)	1233.4x704.7x60	1483.20x859.12x78	1705.36 x 984.38 x 78	1951.56 x 1123.7 x 78	2193.4x1255.3x90	2477.1x1411.4x90

SPECIFICATION

Model	LIB-CD55	LIB-CD65	LIB-CD75	LIB-CD86	LIB-CD98	LIB-CD110
Packaging Dimensions (mm)	1340x830x150	1630x220x1050	1860 x 220 x 1160	2120 x 220 x 1325	2525 x 325 x 1570	2660x300x1670
Gross Weight (kg)	TBD	32.8	45.35	58.8	100	153
VESA Standard	500 x 400 mm	500 x 400 mm	600 x 400 mm	800 x 400 mm	1000 x 400 mm	1000 x 400 mm
Max.use time (hour/day)	24/7					
Accessories	Power Supply Cable, User Manual, Remote Control, Wall Mount					