



LIB-IFPC Series

Capacitive Interactive Flat Panel

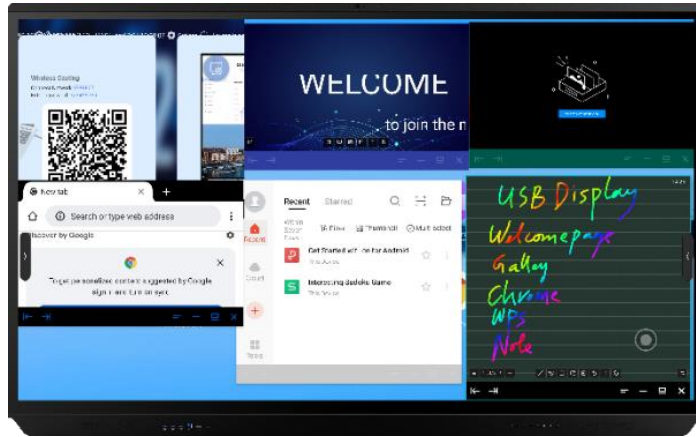

The LIB-IFPC Series is the capacitive interactive flat panel product. LIB-IFPC Series includes screen sizes 65 inch, 75 inch, 86 inch. 4K Ultra HD display, support full channel 4K UI display. Displaying clear images, detail, edge and color refinement.


LIB-IFPC Series supports full-featured Type-C. One cable to achieve Video, Audio, Touch, Net-Work, Charging transmission, USB data transmission. LIB-IFPC Series uses Optical Bonding technology, wide viewing angle 178°. LIB-IFPC Series supports 20 points touch with Pen and shape tools

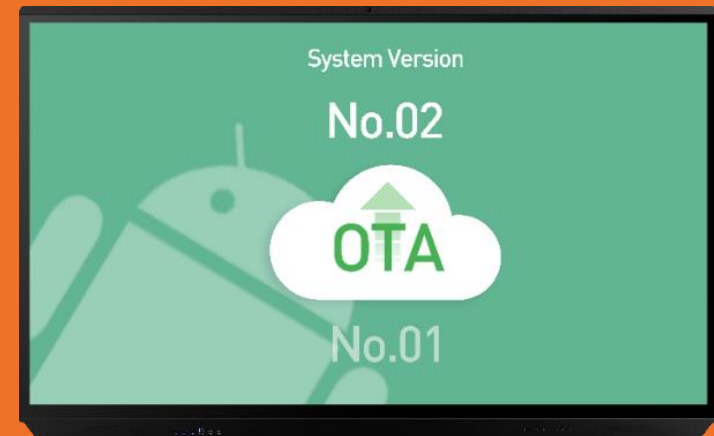


FEATURES




Android

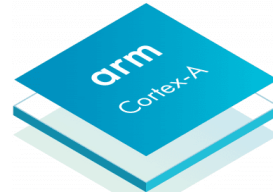


4 Cores ARM



Featured USB-C



Optical Bonding



PC Module



20 Points Touch



Integrated Speakers



WiFi 6

SPECIFICATION

Model	LIB-IFPC65	LIB-IFPC75	LIB-IFPC86
Screen size	65''	75''	86''
Bonding technology	Optical Bonding		
Aspect Ratio	16:9		
Max Visual Area (H/V) (mm)	1428.48 x 803.52	1649.664 x 927.936	1895.04 x 1065.96
Resolution (pixels)	4K UHD 3840 x 2160		
Brightness (cd/m ²)	350		
Contrast ratio (Typ)	1100:1, 1200:1, 1300:1, 4000:1, 5000:1		
Viewing Angles (H/V)	178°		
Refresh rate	60 Hz		
Response Time	8 ms		
Back Light	DLED		
Life Time	≥ 30000 (hours)		
Touch Technology	Capacitive		
Supported Systems	Windows 10/8/7/XP/Android/Linux/Mac OS/Chrome		
Interactivity	Simultaneous Pen and Touch		
Touch Accuracy	± 1 mm		
System Version	Android 13.0		
CPU	4-Core A73 and 4-Core A53		
RAM/ROM	4 (8) GB DDR4/ 32 (128) GB		
Bluetooth	Version 5, 2.4 GHz		
Wifi	Version 802.11ac/b/g/n/a/ax, 2.4GHz/5GHz, Wifi 6.0		
Front Interfaces	USB 3.0 x 3, HDMI in x 1, Touch USB x 1, USB Type-C x 1		
Rear Interfaces	RS232 x 1, USB-C (3.0) x 1, HDMI in (2.0) x 2, MIC in x 1, USB (3.0) x 2, RJ45 x 1, HDMI out x 1, Earphone/Line-out x 1, Digital coax out x 1		
Speaker	2 x 16 W		
Max. Power Consumption	180 W	280 W	480 W
Voltage	100-240V, 50/60Hz		
Working Temperature	0° - 40°C		

SPECIFICATION

Model	LIB-IFPC65	LIB-IFPC75	LIB-IFPC86
Working Humidity		10% - 90% RH	
Product Dimensions (mm)	1483.14 x 943.52 x 81.7	1705.3 x 1068.66 x 81.7	1951.50 x 1211 x 83.07
Packaging Dimensions (mm)	1630 x 220 x 1050	1860 x 220 x 1160	2120 x 220 x 1325
Net Weight (kg)	35	47.2	61.5
VESA Wall Mount	500 x 400	600 x 400	800 x 400
Wall Screw		M8 x 20 mm	
Accessories	Power Cable, Stylus pen, Wall mout Bracket, remote control, User Manual		