


LIB-IFPI High End Series

Infrared Interactive Flat Panel



The LIB-IFPI High End Series is the infrared interactive flat panel product. LIB-IFPI High End Series includes screen sizes 65 inch to 110 inch. 4K Ultra HD display, support full channel 4K UI display. Displaying clear images, detail, edge and color refinement.

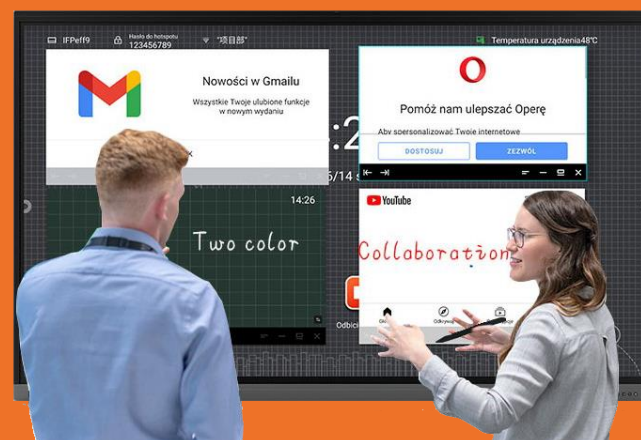


FEATURES



4K UHD




Android




8 Cores ARM



Featured USB-C



Zero Bonding



PC Module



Upto 20/40
Points Touch



Integrated Speakers
Build-in Subwoofer



Eyes Protection
Display



WIFI 6

SPECIFICATION

Model	LIB-IFPI65H	LIB-IFPI75H	LIB-IFPI86H	LIB-IFPI98H	LIB-IFPI110H
Screen size	65"	75"	86"	98"	110"
Bonding technology	Zero Bonding				
Aspect Ratio	16:9				
Max Visual Area (H/V) (mm)	1429 x 804	1650.24 x 928.26	1895.04 x 1065.96	2158.848 x 1214.352	2439.48x1373.52
Resolution	4K UHD 3840 x 2160				
Brightness (cd/m ²)	350	350	450	450	440
Contrast ratio (Typ)	1100:1, 1200:1, 1300:1, 5000:1 (typ.)	1200:1, 4000:1, 5000:1, 6000:1 (typ.)	1100:1, 1200:1, 4000:1, 5000:1 (typ.)	1300:1 (typ.)	1200:1 (typ.)
Viewing Angles (H/V)	178°				
Refresh rate	60 Hz			120 Hz	
Response Time	8 ms				
Back Light	DLED				
Life Time	≥ 50000 (hours)				
Touch Technology	Infrared Touch				
Supported Systems	Windows 10/8/7/XP / Android / Linux / Mac OS / Chrome				
Interactivity	Simultaneous Pen and Touch				
Touch Accuracy	± 1mm				
System Version	Android 11.0				
CPU	Amlogic 311D2: A73 x 4 + A53 x 4 (4 Cores 4 Cores)				
GPU	Mali G52 (8 Cores)				
RAM	8 GB DDR4 / 128 GB DDR4				
ROM					
Bluetooth	Version 5, 2.4 GHz				
Wifi	Version 802.11ac/b/g/n/a/ax, 2.4GHz/5GHz, Wifi 6.0				
Front Interfaces	USB 3.0 x 2, HDMI in x 1, Touch USB x 1, USB Type-C x 1				
Rear Interfaces	HDMI IN x 2, USB 3.0 x 2, TYPE-C x 1, TOUCH USB x 2, HDMI OUT x 1, COAX x 1, RS232 x 1, USB2.0 x 1, DP x 1, AUDIO IN x 1, VGA x 1, Audio out x 1, RJ45 IN x 1. RJ45 OUT x 1				
Speaker	2.1 (2x16 W + 1x15W)				

SPECIFICATION

Model	LIB-IFPI65H	LIB-IFPI75H	LIB-IFPI86H	LIB-IFPI98H	LIB-IFPI110H
Camera	<i>Optional: Built-in Camera 48MP and 8 Line Array Mic</i>				
Max. Power Consumption	180W	280W	480W	550W	850W
Voltage	100-240V~ 50/60Hz 4A				
Working Temperature	0° - 40°C				
Working Humidity	10% - 90%RH				
Product Dimensions (mm)	1484.6×919.9×87.2	1706.8×1044×87.2	1953 x 1184.4 x 87.2	2216.8 x 1331 x 104.3	2500.3 x 1049.3 x 104.3
VESA Wall Mount (mm)	500 x 400	600 x 400	800 x 400	1000 x 400	
Wall Screw (mm)	M8 x 20				
Accessories	Power Cable, Stylus pen, Wall mout Bracket, remote control, User Manual				