


## LIB-IFPI Premium Series

### Infrared Interactive Flat Panel



The LIB-IFPI Premium Series is the infrared interactive flat panel product. LIB-IFPI Premium Series includes screen sizes 55 inch to 98 inch. 4K Ultra HD display, support full channel 4K UI display. Displaying clear images, detail, edge and color refinement.

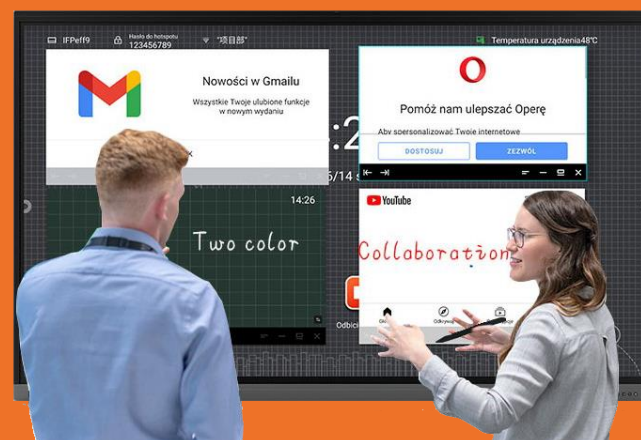


FEATURES




4K UHD




Android




4 Cores ARM



Featured USB-C



Zero Bonding



PC Module



Upto 20/40  
Points Touch



Integrated Speakers  
Build-in Subwoofer



Eyes Protection  
Display



WIFI 6

## SPECIFICATION

Model	LIB-IFPI55	LIB-IFPI65	LIB-IFPI75	LIB-IFPI86	LIB-IFPI98
Screen size	55"	65"	75"	86"	98"
Bonding technology	Zero Bonding				
Aspect Ratio				16:9	
Max Visual Area (H/V) (mm)	1209.6 x 680.4	1429 x 804	1651 x 929	1896 x 1067	2159 x 1215
Resolution	4K UHD 3840 x 2160				
Brightness (cd/m <sup>2</sup> )	350	350	350	350/450	400/450
Contrast ratio (Typ)	1200:1, 4000:1, 5000:1, 6000:1				
Viewing Angles (H/V)	178°				
Refresh rate	60 Hz				
Response Time	8 ms				
Back Light	DLED				
Life Time	≥ 50000 (hours)				
Touch Technology	Infrared Touch				
Supported Systems	Windows 10/8/7/XP / Android / Linux / Mac OS / Chrome				
Interactivity	Simultaneous Pen and Touch				
Touch Accuracy	± 1mm				
System Version	Android 11.0				
CPU	Quad core A55				
GPU	Mali G52MP2				
RAM	4 GB DDR4 / 32 GB DDR4				
ROM					
Bluetooth	Version 5, 2.4 GHz				
Wifi	Version 802.11ac/b/g/n/a/ax, 2,4GHz/5GHz, Wifi 6.0				
Front Interfaces	USB 3.0 x 2, HDMI in x 1, Touch USB x 1, USB Type-C x 1				
Rear Interfaces	HDMI IN x 2, USB 3.0 x 2, TOUCH USB x 1, RS232 x 1, USB2.0 x 1, AUDIO IN x 1, OPTICAL OUT x 1, LINE OUT x 1, RJ45 IN x 1, RJ45 OUT x 1				
Speaker	2.0 (2x16 W)				

**SPECIFICATION**

Model	LIB-IFPI55	LIB-IFPI65	LIB-IFPI75	LIB-IFPI86	LIB-IFPI98
Camera			<i>Optional: Built-in Camera 13MP</i>		
Max. Power Consumption	330W	400W	400W	550W	550W
Voltage	100-240V~ 50/60Hz 4A				
Working Temperature	0° - 40°C				
Working Humidity	10% - 90%RH				
Product Dimensions (mm)	1263×776.8×87.6	1484.6×903.08×87.21	1706.76 x 1027.32 x 87.31	1952.96 1167.77 87.18	2216.8 x 1314.28 x 104.31
VESA Wall Mount (mm)	400 x 200	500 x 400	600 x 400	800 x 400	1000 x 400
Wall Screw (mm)	M8 x 25		M8 x 20		
Accessories	Power Cable, Stylus pen, Wall mout Bracket, remote control, User Manual				